



**BIG FOOT  
SYSTEMS**



# H Frame Set

## Typical Application

For supporting small and large pipe work systems, ductwork runs & cable trays.

## Dimensional Data & Product Weights

Two sizes of H Frame Set are available complete with anti vibration mats:

H Frame Set	Length (mm)	Width (mm)	Height (mm)	Weight boxed (Kg)	Part No.
<b>SMALL</b>	305	305	75	5.0	B6088
<b>LARGE</b>	450	450	100	10.0	B6089

## Kit Includes\*

- 2 x plastic feet
- 2 x anti vibration mats
- 2 x strut Inserts (plastic)
- 2 x angle brackets
- 4 x M10 x 25mm bolts
- 4 x M10 square channel nuts

## Accommodates

41 x 41mm strut (not supplied)

## Working Conditions

Suitable for internal or external applications in temperatures between -30°C to +80°C

\*PLEASE NOTE THAT THE H FRAME SET IS SUPPLIED **WITHOUT** STRUT



**BIG FOOT  
SYSTEMS**



STRUT INSERT

# H Frame Set

## Loading

Big Foot Systems takes no responsibility for the installation of the H Frame Sets. As the strut which is needed to make a support is not supplied, the following information should be used as a guideline only.

H Frame Set (2 Feet)	Max. recommended load (Kg)
<b>SMALL</b>	100
<b>LARGE</b>	150

## Plastic Foot

Material – Nylon 6 B601L 30% Glass Fibre Filled

Property	Test Method ASTM	Test Method ISO Equiv	Units	Value 30%
<b>Physical</b>				
Specific gravity	D792	ISO 1183	Kg/m <sup>3</sup>	1.36
Water Absorbtion	D570	ISO 62	%	1.1
Mould Shrinkage (flow)		ISO 2577	%	0.35
<b>Mechanical</b>				
Tensile Strength	D638	ISO 527	MPa	130
Elongation at break	D638	ISO 527	%	4
Flexural Strength	D790	ISO 178	MPa	190
Flexural modulus	D790	ISO 178	Gpa	5900
Notched Charpy Impact		ISO 179/1eA	kJ/m <sup>2</sup>	45
Unnotched Charpy Impact		ISO 179/1eU	kJ/m <sup>2</sup>	
<b>Thermal</b>				
Melting Point		ISO 3146	°C	220
Vicat Softening Point	D789	ISO 12188	°C	
Deflection Temperature	D648	ISO 75	°C	
			A 1.85 Mpa	210
			A 0.46 Mpa	220
<b>Flammability</b>				
UL94 m/m		ISO 75		V2

All data generated from specimens moulded in natural material, stored in a dry atmosphere (no more than 0.2% moisture). The inclusion of colour pigments or other additives may change some of the test results All technical information supplied is accurate and reliable to the best of our knowledge. The information is given without warranty or guarantee and is intended for initial guidance or comparative purposes.

**BIG FOOT  
SYSTEMS**

# H Frame Set

## Anti Vibration Mat

### Quality Assurance

Raw materials are selected from ISO9002 registered suppliers

### Construction

Pressure moulded using a one or two part mix, utilising milled, sieved & graded Styrene Butadiene Rubber (SBR-Recycled Rubber). Bound using a ratio of high quality moisture curing Polyurethane Pre-Polymer. Manufactured with a built in shrinkage allowance.

### Safety Standards

All parts of British Standard BS7188:1989 & BS5696 Part 3:1979

European Standard PR EN 1177

U.S.A. Standard ASTM F 1292-99

*Big Foot Systems takes no responsibility for the condition of the roof on which our equipment is to be used. You must ensure that the substrate on which the Big Foot is intended for use is structurally sound enough to take the weight and point loadings we have indicated. The Big Foot products must be installed in line with the guarantees and recommendations of the manufacturer of the roofing system. The manufacturer of PVC membranes should advise on the susceptibility migration of plasticizers and specific recommendations should be adhered to so that the roof guarantee is not affected.*





**BIG FOOT  
SYSTEMS**

# H Frame Set

## Technical Drawings

### 305mm Plastic Foot

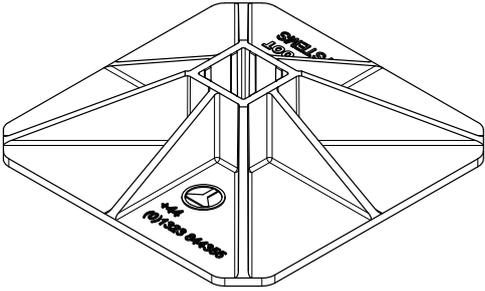
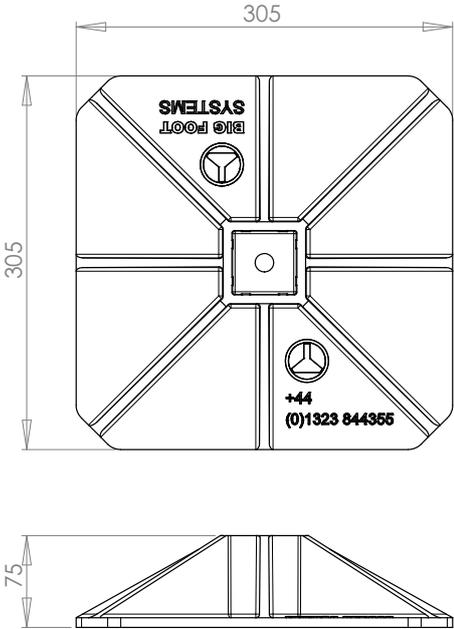




**BIG FOOT  
SYSTEMS**

# H Frame Set

Technical Drawings  
**305mm Anti Vibration Mat**

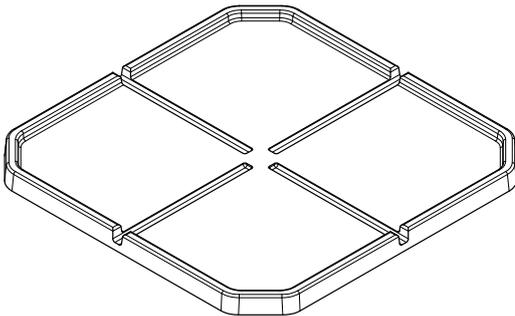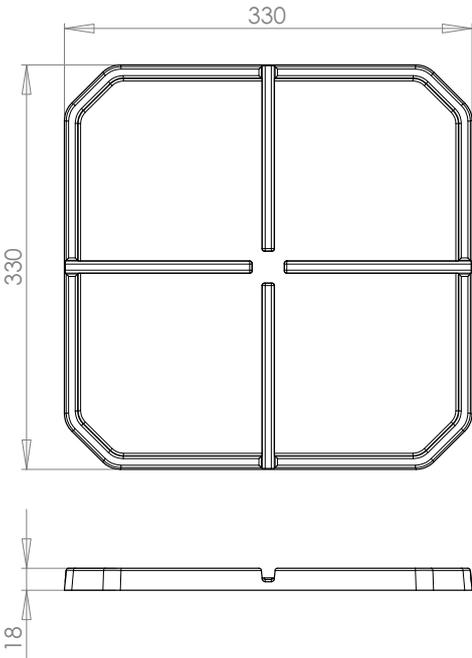





**BIG FOOT  
SYSTEMS**

# H Frame Set

## Technical Drawings

### 450mm Plastic Foot

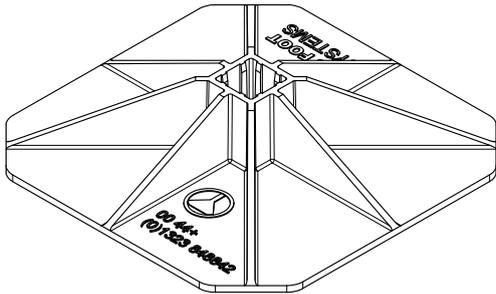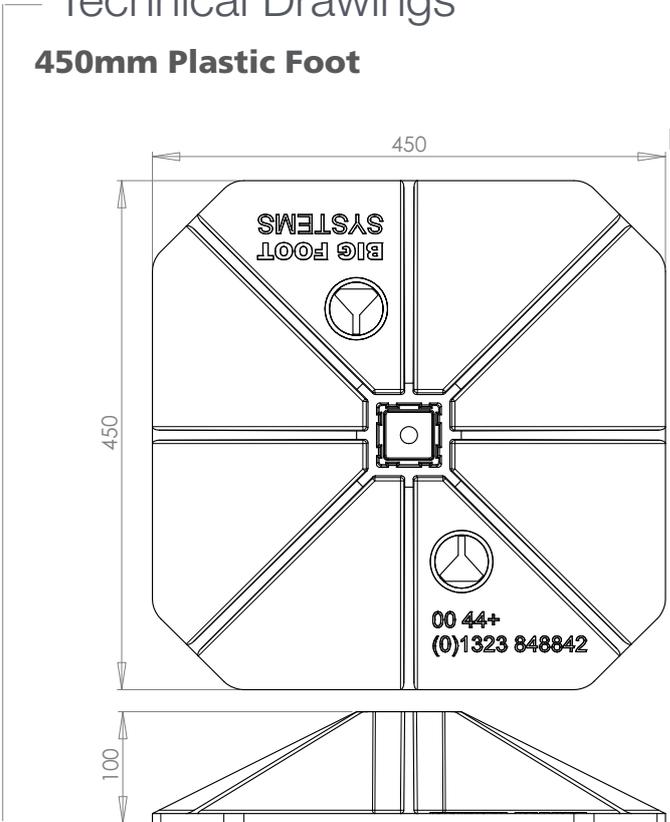



**BIG FOOT  
SYSTEMS**

# H Frame Set

Technical Drawings  
**450mm Anti Vibration Mat**

